



Custom SPEED SPOOL® SLP

CG1H, CG1SH, CG1XH



Lew's® Custom reels are designed to be **SUPER LOW PROFILE**

Driven by innovation - Fueled with Passion
Feel the Difference!


Custom SPEED SPOOL® SLP

Reel Specifications

Model	Weight (oz.)	Gear Ratio	Line Capacity (yd./lb.)	IPT
CG1H	6.6	6.8:1	110/12	27"
CG1SH	6.6	7.5:1	110/12	30"
CG1XH	6.6	8.3:1	110/12	33"
CG1SHL*	6.6	7.5:1	110/12	30"

*Left hand retrieve.

Exclusive **SPEED KEEPER** Hook Keeper

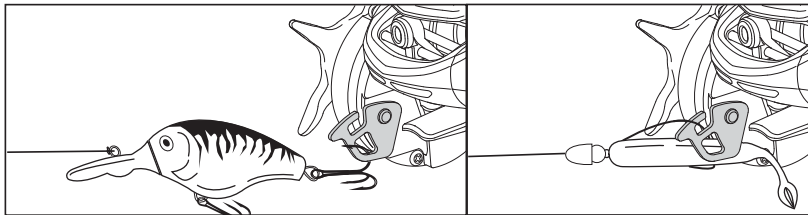

FEATURES:

- Exclusive Speed Keeper Hook Keeper (pat. pend.)
- 10-bearings system with stainless steel double shielded ball bearings and Zero-Reverse one-way clutch bearing
- One-piece aluminum frame
- Speed Dial provides quick and easy line recognition
- Double anodized U-spool
- Multi-Setting Brake (MSB) dual cast control system
- Rugged carbon fiber drag system - provides up to 14 lb. of drag power
- Zirconia line guide
- External lube port

SPEED DIAL



Performance – Right out of the Box!

Your new Custom Speed Spool® SLP baitcast reel by Lew's® is designed for performance and functionality. From the way it conforms to your hand, to the way it reacts crisply and effortlessly to your command, you'll know the minute you grab onto the Custom Speed Spool® SLP that you've got a quality reel.

Your Speed Spool® SLP reel exploits several new developments which will allow you to set yourself apart from the competition.

High Strength Aluminum Gearing

The drive gear, crankshaft, and worm shaft are made of high strength aluminum for increased strength and durability. In addition to these advantages, aluminum provides exceptionally low friction to enhance efficiency.

One-piece Aluminum Frame

Machined Aluminum Spool

Your Speed Spool® reel utilizes a one-piece all aluminum frame. So you'll never have to worry about frame twisting or torquing.

Innovative Line Recognition Speed Dial

Your Speed Spool® reel features a convenient line indicator dial on the spool's tension knob. Quickly recognize what line type and line weight you have loaded on your reel.



Lightweight Machined Aluminum Spool

The spool on your Lew's® reel has been engineered to maximize casting distance. Anodized to withstand oxidation and abrasion, machined and built for deep capacity.

10 Bearing System


Anti-Reverse Bearing

The handle on your Speed Spool® reel will only rotate forward for rock solid hook setting. When you release the handle it will hold its position because of Anti-Reverse bearings, never losing an inch on your catch; an invaluable property to have when you're pulling it in.

Multi-Setting Braking System (MSB)

Multi-Setting Brake **MSB**

In order to combat backlash after a cast your Speed Spool reel is furnished with both a centrifugal brake system and an externally adjustable magnetic brake system. As the spool accelerates it experiences magnetic resistance as well as friction by four internal brake shoes which slide outwards when engaged. You can control the magnetic brake with a dial on the palming side-plate. To disengage individual brake shoes remove the palming side-plate. The four brake shoes are housed within a disk attached to the spool assembly. When disengaged the brake shoes remain stationary when the spool spins and do not inflict friction on the spool.



Cast Control System

A second feature exists to prevent backlash, the Cast Control System. An adjustment knob is found next to the star drag. The function saddles the spool shaft with steady pressure in order to stabilize spool speed.

To calibrate the system reel your lure in until it rests on the tip of the rod, then tighten the knob until taut. Depress the thumb bar, and holding the rod horizontally loosen the knob slowly until the lure begins to descend. The spool should continue to spin after the lure contacts the ground, but should not complete more than one full rotation. If the spool does not continue to spin, the knob is too tight. If the spool completes more than one rotation, the knob is too loose. Repeat until you have achieved the desired results.

Bowed 95MM Aluminum Handle

Our 95mm bowed aluminum handle will give you all the cranking power you need. The Winn® advanced polymer Dri-tac handle knobs are an added bonus known for its comfortable fit and ease for all day fishing.




Maintenance and Care

When applying lubricant to your Speed Spool[®] reel, avoid using multi-purpose oil. Use lightweight oils or greases made for fishing reels. Apply oil to all bearings, the crankshaft and the worm gear. Apply grease to the bushings, pinion gears, drive gears, and crank gears.


After usage, your reel should be inspected for dirt or sand and cleaned if excessive build-up is present. If your reel has come in contact with saltwater it is important to flush all parts with water, dry and re-lubricate your reel. Through diligent cleaning and maintenance your Lew's[®] reel will provide you with years of reliability and sound performance.

fig 1 To remove palming sideplate slide down lever (144) and pull sideplate off (96).

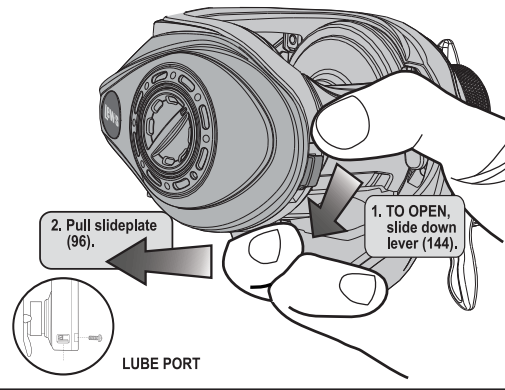

For professional cleaning and maintenance send your reel postage prepaid to:

Lew's 3031 N. Martin Ave.
Springfield, MO 65803
Phone: 877-470-5397
or 417-522-1093
FAX: 1-417-881-5387
lews.com

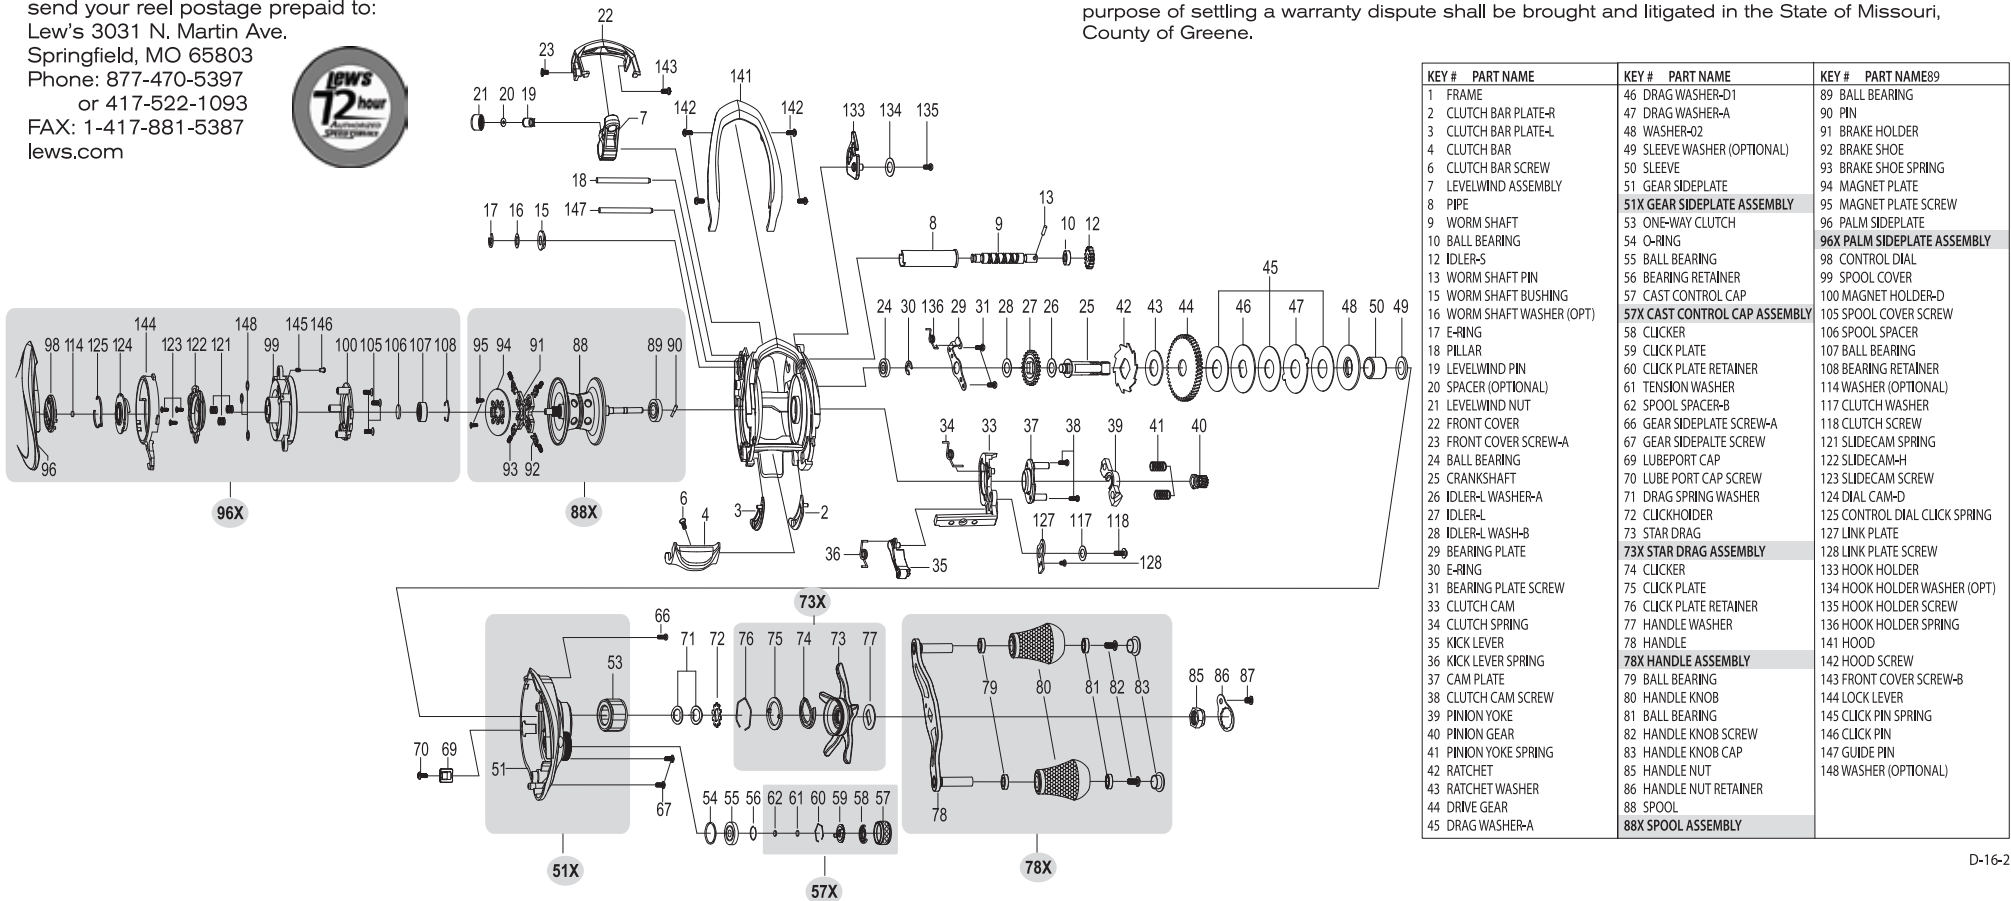

KEY #	PART NAME	KEY #	PART NAME	KEY #	PART NAME ⁸⁹
1	FRAME	46	DRAG WASHER-D1	89	BALL BEARING
2	CLUTCH BAR PLATE-R	47	DRAG WASHER-A	90	PIN
3	CLUTCH BAR PLATE-L	48	WASHER-02	91	BRAKE HOLDER
4	CLUTCH BAR	49	SLEEVE WASHER (OPTIONAL)	92	BRAKE SHOE
5	CLUTCH BAR SCREW	50	SLEEVE	93	BRAKE SHOE SPRING
6	LEVELWIND ASSEMBLY	51	GEAR SIDEPLATE	94	MAGNET PLATE
7	LEVELWIND ASSEMBLY	51X	GEAR SIDEPLATE ASSEMBLY	95	MAGNET PLATE SCREW
8	PIPE	51X	ONE-WAY CLUTCH	96	PALM SIDEPLATE
9	WORM SHAFT	54	O-RING	96X	PALM SIDEPLATE ASSEMBLY
10	BALL BEARING	55	BALL BEARING	98	CONTROL DIAL
11	IDLER-S	56	BEARING RETAINER	99	SPOOL COVER
12	WORM SHAFT PIN	57	CAST CONTROL CAP	100	MAGNET HOLDER-D
13	WORM SHAFT BUSHING	57X	CAST CONTROL CAP ASSEMBLY	105	SPOOL COVER SCREW
14	WORM SHAFT WASHER (OPT)	58	CLICKER	106	SPOOL SPACER
15	E-RING	59	CLICK PLATE	107	BALL BEARING
16	PILLAR	60	CLICK PLATE RETAINER	108	BEARING RETAINER
17	LEVELWIND PIN	61	TENSION WASHER	114	WASHER (OPTIONAL)
18	SPACER (OPTIONAL)	62	SPOOL SPACER-B	117	CLUTCH WASHER
19	LEVELWIND NUT	66	GEAR SIDEPLATE SCREW-A	118	CLUTCH SCREW
20	FRONT COVER	67	GEAR SIDEPLATE SCREW	121	SLIDECAM SPRING
21	FRONT COVER SCREW-A	69	LUBEPORT CAP	122	SLIDECAM-H
22	BALL BEARING	70	LUBE PORT CAP SCREW	123	SLIDECAM SCREW
23	CRANKSHAFT	71	DRAG SPRING WASHER	124	DIAL CAM-D
24	IDLER-L WASHER-A	72	CLICK/HOLDER	125	CONTROL DIAL CLICK SPRING
25	IDLER-L	73	STAR DRAG	127	LINK PLATE
26	IDLER-L WASH-B	73X	STAR DRAG ASSEMBLY	128	LINK PLATE SCREW
27	BEARING PLATE	74	CLICKER	133	HOOK HOLDER
28	E-RING	75	CLICK PLATE	134	HOOK HOLDER WASHER (OPT)
29	BEARING PLATE SCREW	76	CLICK PLATE RETAINER	135	HOOK HOLDER SCREW
30	CLUTCH CAM	77	HANDLE WASHER	141	HOOD
31	CLUTCH SPRING	78	HANDLE ASSEMBLY	142	HOOD SCREW
32	KICK LEVER	79	BALL BEARING	143	FRONT COVER SCREW-B
33	KICK LEVER SPRING	80	HANDLE KNOB	144	LOCK LEVER
34	CAM PLATE	81	BALL BEARING	145	CLICK PIN SPRING
35	CLUTCH CAM SCREW	82	HANDLE KNOB SCREW	146	CLICK PIN
36	CLUTCH YOKER	83	HANDLE KNOB CAP	147	GUIDE PIN
37	PINION YOKE	85	HANDLE NUT	148	WASHER (OPTIONAL)
38	PINION GEAR	86	HANDLE NUT RETAINER		
39	PINION YOKE SPRING	88	SPOOL		
40	RATCHET	88X	SPOOL ASSEMBLY		
41	RATCHET WASHER				
42	DRIVE GEAR				
43	DRAG WASHER-A				

Lew's® Custom SPEED SPOOL® SLP

CG1SHL



Lew's® Custom reels are designed to be **SUPER LOW PROFILE**

Driven by innovation - Fueled with Passion
Feel the Difference!


Custom SPEED SPOOL® SLP

Reel Specifications

Model	Weight (oz.)	Gear Ratio	Line Capacity (yd./lb.)	IPT
CG1H	6.6	6.8:1	110/12	27"
CG1SH	6.6	7.5:1	110/12	30"
CG1XH	6.6	8.3:1	110/12	33"
CG1SHL*	6.6	7.5:1	110/12	30"

*Left hand retrieve.

Exclusive **SPEED KEEPER** Hook Keeper

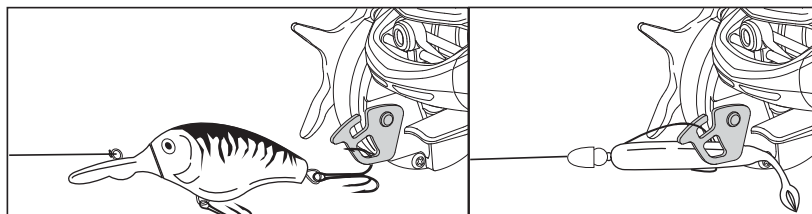

FEATURES:

- Exclusive Speed Keeper Hook Keeper (pat. pend.)
- 10-bearings system with stainless steel double shielded ball bearings and Zero-Reverse one-way clutch bearing
- One-piece aluminum frame
- Speed Dial provides quick and easy line recognition
- Double anodized U-spool
- Multi-Setting Brake (MSB) dual cast control system
- Rugged carbon fiber drag system - provides up to 14 lb. of drag power
- Zirconia line guide
- External lube port

SPEED DIAL



Performance – Right out of the Box!

Your new Custom Speed Spool® SLP baitcast reel by Lew's® is designed for performance and functionality. From the way it conforms to your hand, to the way it reacts crisply and effortlessly to your command, you'll know the minute you grab onto the Custom Speed Spool® SLP that you've got a quality reel.

Your Speed Spool® SLP reel exploits several new developments which will allow you to set yourself apart from the competition.

High Strength Aluminum Gearing

The drive gear, crankshaft, and worm shaft are made of high strength aluminum for increased strength and durability. In addition to these advantages, aluminum provides exceptionally low friction to enhance efficiency.

One-piece Aluminum Frame

Your Speed Spool® reel utilizes a one-piece all aluminum frame. So you'll never have to worry about frame twisting or torquing.

Machined Aluminum Spool 

Innovative Line Recognition Speed Dial

Your Speed Spool® reel features a convenient line indicator dial on the spool's tension knob. Quickly recognize what line type and line weight you have loaded on your reel.

SPEED DIAL



Lightweight Machined Aluminum Spool

The spool on your Lew's® reel has been engineered to maximize casting distance. Anodized to withstand oxidation and abrasion, machined and built for deep capacity.

10 Bearing System

Anti-Reverse Bearing

The handle on your Speed Spool® reel will only rotate forward for rock solid hook setting. When you release the handle it will hold its position because of Anti-Reverse bearings, never losing an inch on your catch; an invaluable property to have when you're pulling it in.

Multi-Setting Braking System (MSB)

In order to combat backlash after a cast your Speed Spool reel is furnished with both a centrifugal brake system and an externally adjustable magnetic brake system. As the spool accelerates it experiences magnetic resistance as well as friction by four internal brake shoes which slide outwards when engaged. You can control the magnetic brake with a dial on the palming side-plate. To disengage individual brake shoes remove the palming side-plate. The four brake shoes are housed within a disk attached to the spool assembly. When disengaged the brake shoes remain stationary when the spool spins and do not inflict friction on the spool.

Multi-Setting Brake **MSB**



Cast Control System

A second feature exists to prevent backlash, the Cast Control System. An adjustment knob is found next to the star drag. The function saddles the spool shaft with steady pressure in order to stabilize spool speed.

To calibrate the system reel your lure in until it rests on the tip of the rod, then tighten the knob until taut. Depress the thumb bar, and holding the rod horizontally loosen the knob slowly until the lure begins to descend. The spool should continue to spin after the lure contacts the ground, but should not complete more than one full rotation. If the spool does not continue to spin, the knob is too tight. If the spool completes more than one rotation, the knob is too loose. Repeat until you have achieved the desired results.

Bowed 95MM Aluminum Handle

Our 95mm bowed aluminum handle will give you all the cranking power you need. The Winn® advanced polymer Dri-tac handle knobs are an added bonus known for its comfortable fit and ease for all day fishing.





Custom SPEED SPOOL® SLP CGISHL

One Year Limited Warranty

Maintenance and Care

When applying lubricant to your Speed Spool® reel, avoid using multi-purpose oil. Use lightweight oils or greases made for fishing reels. Apply oil to all bearings, the crankshaft and the worm gear. Apply grease to the bushings, pinion gears, drive gears, and crank gears.

After usage, your reel should be inspected for dirt or sand and cleaned if excessive build-up is present. If your reel has come in contact with saltwater it is important to flush all parts with water, dry and re-lubricate your reel. Through diligent cleaning and maintenance your Lew's® reel will provide you with years of reliability and sound performance.

For professional cleaning and maintenance send your reel postage prepaid to:
Lew's 3031 N. Martin Ave.
Springfield, MO 65803
Phone: 877-470-5397
or 417-522-1093
FAX: 1-417-881-5387
lews.com


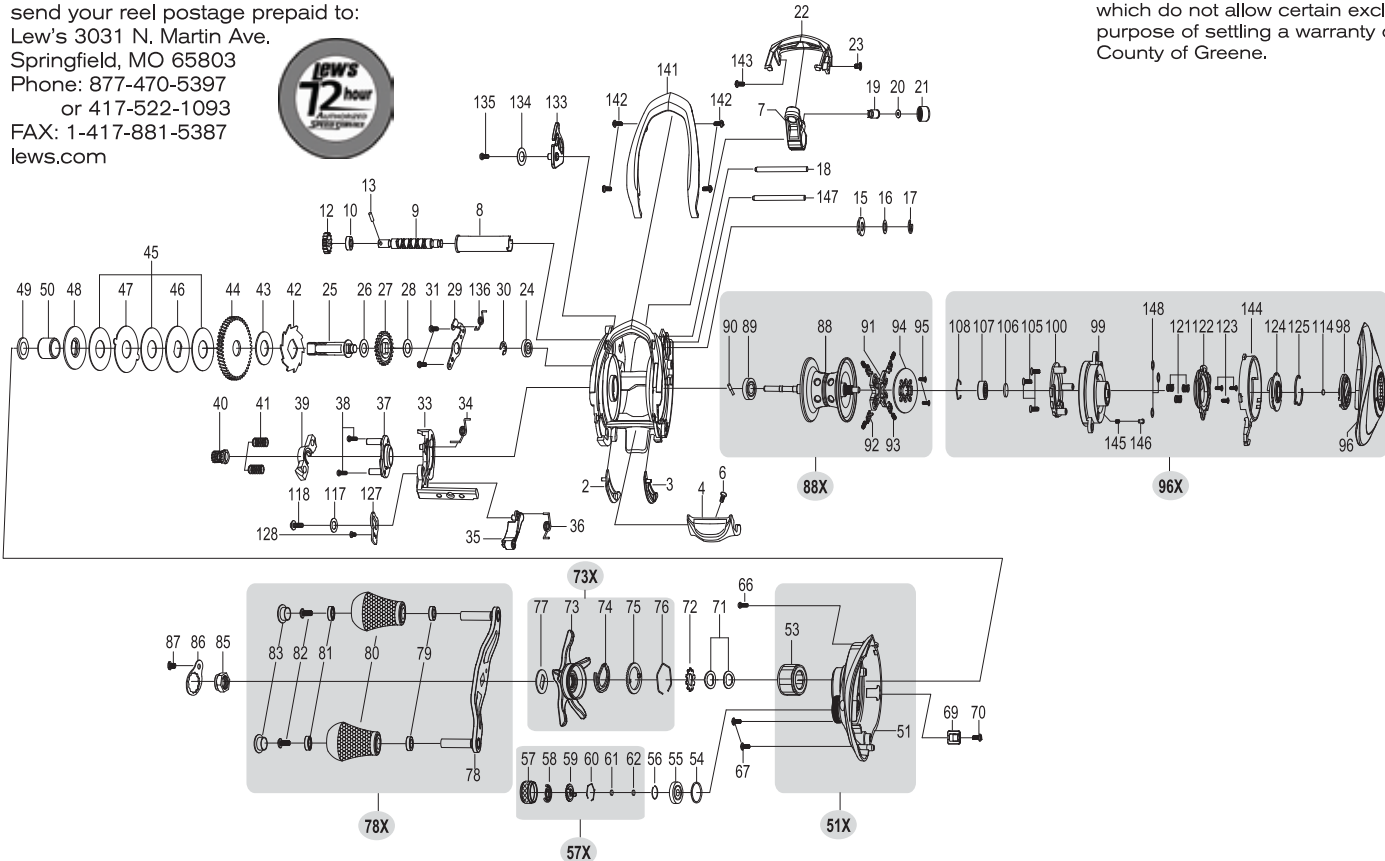


fig 1 To remove palming sideplate slide down lever (144), and pull sideplate off (96).

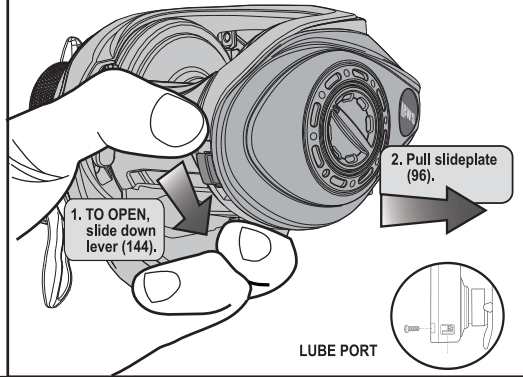

Lew's® Warrants its products¹ to withstand normal² use for the purpose designed and intended when manufactured for a period of one (1) year from the original retail sale date to the original retail consumer. Lew's® will at its option repair or replace³ Lew's® products when required for the warranty period and return⁴ the product to the owner at no additional⁵ cost to the owner.

¹Numerous products have been manufactured under variations of the Lew's® name and under the Lew's® Logo by multiple businesses over the past 50 years. This warranty is specifically for products manufactured on behalf of Lew's® of Springfield, Missouri USA since January 1, 2010. Lew's® products manufactured by or on behalf of other entities prior to January 1, 2010 are not covered by this warranty. In all circumstances, this Warranty is Limited in Value to the original retail value of the product and is limited to actual damage to the Lew's® product and only the Lew's® product. ²Loss of a product, and loss/damage of a product or parts due to the attempted repair or servicing of a Lew's® product by any person or business other than Lew's® or Lew's® Authorized Warranty Service Agent, and damage caused by or resulting from abuse, misuse, lack of recommended maintenance, accident, acts of God, and shipping damages occurring in transit to Lew's® or Lew's® Authorized Agent are outside the scope of Lew's® Limited Warranty and will be repaired through Lew's® after warranty services at the expense of the consumer. ³Any products replaced by Lew's® will be new or remanufactured by a Lew's® Authorized Agent with the same or next model upgrade product. ⁴Lew's® will return warranted products to the consumer by reasonable means as determined by Lew's®. ⁵Express or expedited services are the responsibility of the consumer as is sending the product to Lew's® or Lew's® Authorized Agent, for Warranty Service. Lew's® and Lew's® Service Agents as authorized by Lew's® are the sole agents authorized to repair or replace Lew's® products under the terms of this warranty. Only written changes by an officer of Lew's® can alter the terms or conditions of this warranty.

This warranty gives you specific legal rights including additional rights extended by some states which do not allow certain exclusions and limitations. Any action brought against Lew's® for the purpose of settling a warranty dispute shall be brought and litigated in the State of Missouri, County of Greene.

KEY #	PART NAME	KEY #	PART NAME	KEY #	PART NAME ⁸⁹
1	FRAME	46	DRAG WASHER-D1	89	BALL BEARING
2	CLUTCH BAR PLATE-R	47	DRAG WASHER-A	90	PIN
3	CLUTCH BAR PLATE-L	48	WASHER-02	91	BRAKE HOLDER
4	CLUTCH BAR	49	SLEEVE WASHER (OPTIONAL)	92	BRAKE SHOE
6	CLUTCH BAR SCREW	50	SLEEVE	93	BRAKE SHOE SPRING
7	LEVELWIND ASSEMBLY	51	GEAR SIDEPLATE	94	MAGNET PLATE
8	PIPE	51X	GEAR SIDEPLATE ASSEMBLY	95	MAGNET PLATE SCREW
9	WORM SHAFT	53	ONE-WAY CLUTCH	96	PALM SIDEPLATE
10	BALL BEARING	54	O-RING	96X	PALM SIDEPLATE ASSEMBLY
12	IDLER-S	55	BALL BEARING	98	CONTROL DIAL
13	WORM SHAFT PIN	56	BEARING RETAINER	99	SPOOL COVER
21	LEVELWIND NUT	57	CAST CONTROL CAP	100	MAGNET HOLDER-D
16	WORM SHAFT WASHER (OPT)	57X	CAST CONTROL CAP ASSEMBLY	105	SPOOL COVER SCREW
17	E-RING	58	CLICKER	106	SPOOL SPACER
18	PILLAR	59	CLICK PLATE	107	BALL BEARING
19	LEVELWIND PIN	60	CLICK PLATE RETAINER	108	BEARING RETAINER
20	SPACER (OPTIONAL)	61	TENSION WASHER	114	WASHER (OPTIONAL)
22	LEVELWIND NUT	62	SPOOL SPACER-B	117	CLUTCH WASHER
23	FRONT COVER	66	GEAR SIDEPLATE SCREW-A	118	CLUTCH SCREW
24	FRONT COVER SCREW-A	67	GEAR SIDEPLATE SCREW	121	SLIDECAM SPRING
25	BALL BEARING	69	LUBEPORT CAP	122	SLIDECAM-H
26	CRANKSHAFT	70	LUBE PORT CAP SCREW	123	SLIDECAM SCREW
27	IDLER-L WASHER-A	71	DRAG SPRING WASHER	124	DIAL CAM-D
27	IDLER-L	72	CLICK/HOLDER	125	CONTROL DIAL CLICK SPRING
28	IDLER-L WASH-B	73	STAR DRAG	127	LINK PLATE
29	BEARING PLATE	73X	STAR DRAG ASSEMBLY	128	LINK PLATE SCREW
30	E-RING	74	CLICKER	133	HOOK HOLDER
31	BEARING PLATE SCREW	75	CLICK PLATE	134	HOOK HOLDER WASHER (OPT)
33	CLUTCH CAM	76	CLICK PLATE RETAINER	135	HOOK HOLDER SCREW
34	CLUTCH SPRING	77	HANDLE WASHER	136	HOOK HOLDER SPRING
35	KICK LEVER	78	HANDLE	141	HOOD
36	KICK LEVER SPRING	78X	HANDLE ASSEMBLY	142	HOOD SCREW
37	CAM PLATE	79	BALL BEARING	143	FRONT COVER SCREW-B
38	CLUTCH CAM SCREW	80	HANDLE KNOB	144	LOCK LEVER
39	PINION YOKE	81	BALL BEARING	145	CLICK PIN SPRING
40	PINION GEAR	82	HANDLE KNOB SCREW	146	CLICK PIN
41	PINION YOKE SPRING	83	HANDLE KNOB CAP	147	GUIDE PIN
42	RATCHET	85	HANDLE NUT	148	WASHER (OPTIONAL)
43	RATCHET WASHER	86	HANDLE NUT RETAINER		
44	DRIVE GEAR	88	SPOOL		
45	DRAG WASHER-A	88X	SPOOL ASSEMBLY		